




CTOL

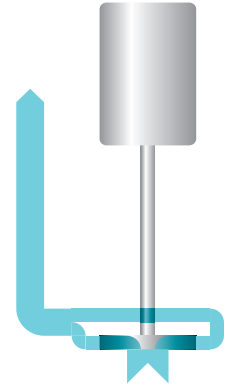

Immersed CTOL

Immersed pumps are all-purpose pumps. They are used where there is lack of spare, poor inflow conditions, critical liquids, and where dry installed pumps are disallowed. Immersed pumps have a modular design for different impeller types and pressure ranges.

Typical applications are pretreatment plants for surface treatment in which hot aggressive liquids are circulated.

Advantages

- **High Process Reliability**
 - no shaft sealing
 - no leakage outwards
 - torque-flow impeller optional
- **Easy Installation**
 - space saving design
 - modular construction for customized solutions
- **Application**
 - operating pressure up to 16 bar
 - temperature -25 °C to + 90 °C
 - viscosity up to 115 mm²/s
 - special executions for other operating conditions





cleaning systems
 surface technology
 industry process pump
 special solutions
 plant engineering
 filtration



Immersed
 CTOL

Characteristics

